


new

全新機型

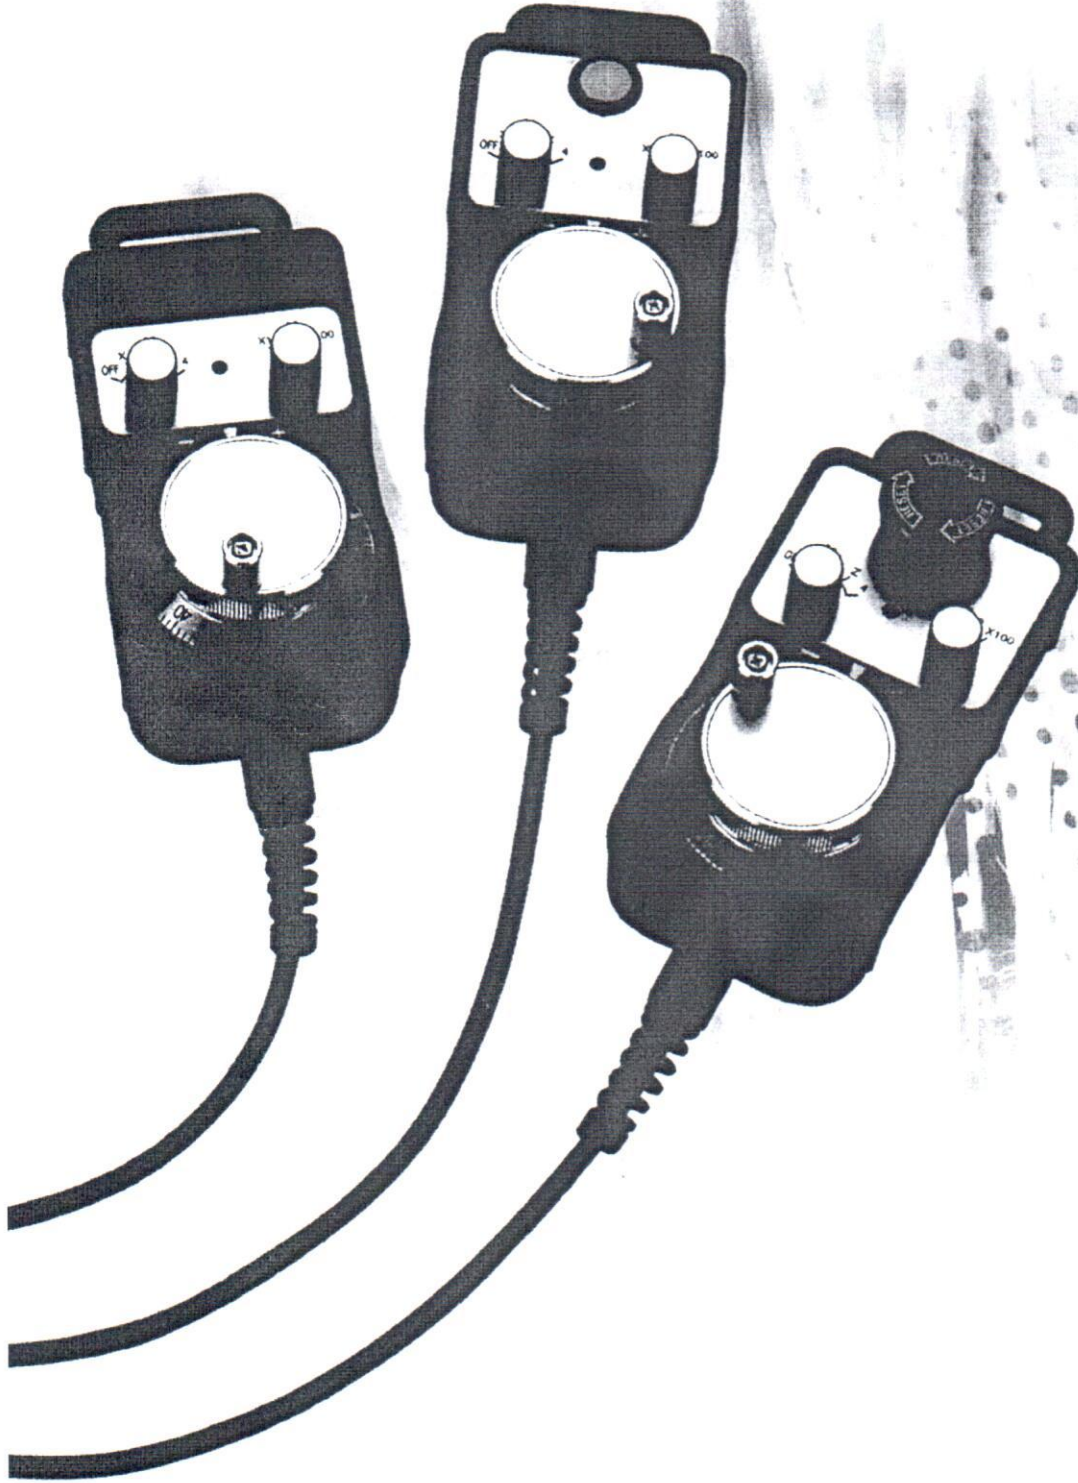

手動脈波發生器

MANUAL PULSES GENERATOR

MANUAL PULSE GENERATOR

規格(Specification)

供給電壓(VCC)	DC4.5~16V(100Pulse)	軸數選擇(Axis)	OFF,X,Y,Z,4	
	DC4.5~16V(25Pulse)		OFF,X,Y,Z,4,5	
	DC5~0.25V(Line Drive)		ENABLE	
LGT	LGT-001-100(100Pulse)	追加機能(Option)	緊急停止開關(STOP)	
	LGT-401-25(25Pulse)		溫度範圍(Temp.)	-10~+60°C
	LGT-003-100(Line Drive)		最長拉拔距離 (Max. Pull Length)	RDA151: 300cm
操作盤(Panel)	MPG-MK(4-Axis)	RDA153: 500cm		
	MPG-MR(5-Axis)	產品重量(WEIGHT)	570g	
倍率選擇(Feed)	X1,X10,X100	外型尺寸(SIZE)	(L)155x(W)71x(H)35mm	

MPG產品型號說明

RT067-MK2 -T-E-S

T	標準型 Standard
E	追加ENABLE功能 Option
S	追加STOP功能 Option
MK2	4軸輸出 (4 AXIS)
MR2	5軸輸出 (5 AXIS)
RT067	LGT-001-100(100)Pulse
RT068	LGT-401-25(25)Pulse
RT069	LGT-003-100(100)Line Drive

MANUAL PULSE GENERATOR CABLE CONNECTION

100/25 PULSE

OUTPUT SINGAL(輸出訊號)	LINE COLOR(線色)	OUTPUT SINGAL(輸出訊號)	LINE COLOR(線色)
+ (5V)	紅 (RED)	OFF	灰 (GARY)
- (0V)	黑 (BLACK)	X	棕 (BRONW)
A	黃 (YELLOW)	Y	橘 (ORANGE)
B	白 (WHITE)	Z	淺藍 (LIGHT BLUE)
X1	綠黑 (GREEN/BLACK)	4	藍 (BLUE)
X10	藍黑 (BLUE/BLACK)	5	綠 (GREEN)
X100	橘黑 (ORANGE/BLACK)	0V	粉紅 (PINK)
COM(24V)	紫 (PURPLE)	DC24V	紅黑 (RED/BLACK)

LGT (A, B, X1, X10, X100)
 倍率 (X1, X10, X100)
 軸向 (X, Y, Z, 4, 5)
 LED (0V, DC24V)